

1/6, 1/4, 1/3 HP THERMOPLASTIC





WATER SYSTEMS

Submersible Utility Pumps



MODELS UTHALC, 2STHALC, 3STHALC

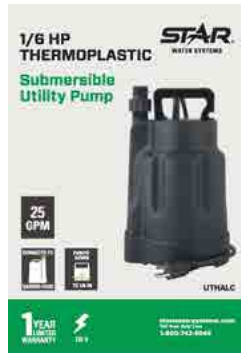

FEATURES AND BENEFITS

- 115V thermal overload protected, energy-efficient motor
- Environmentally friendly, oil-free motor runs cooler and lasts longer
- Thermoplastic body resists corrosion, stress and heat
- Vent hole prevents air lock
- 3/4" discharge with garden hose adapter for easy hookup
- Pumps floor dry to 3/16"; fits into 7" opening
- 10' double-sealed cord

PERFORMANCE

DISCHARGE HEIGHT ABOVE PUMPING LEVEL (LIFT)

	MODEL	HP	AMPS	0 ft.	5 ft.	10 ft.	15 ft.	20 ft.
GALLONS PER MINUTE	UTHALC	1/6	3.0	25	20	15	9	-
	2STHALC	1/4	3.0	30	24	19	11	-
	3STHALC	1/3	4.5	33	29	24	19	13

UTHALC
2STHALC
3STHALC

UPC# 054757000912
UPC# 054757047146
UPC# 054757100872

